

Sonnenschein A200

Technical characteristics and data

Type	Part number	Nominal voltage	Nom. capacity C 20 1.75 V/C 20°C	Discharge current I20	Max. load	Max. permissible current over 5s	Length	Width	Height up to top of cover	Height over terminals	Weight	Terminal (Silver plated)
		V	Ah	mA	appr. A	A	max. mm	max. mm	max. mm	max. mm	approx. g	
A204/1 K	NGA2040001HS0KA	4	1.0	50	40	240	34.9	42.5	50.5	51.7	180	K-Contact
A206/1 S	NGA2060001HS0SA	6	1.0	50	40	240	51.2	42.5	50.5	54.4	280	S-4.8
A206/6.5 S	NGA20606D5HS0SA	6	6.5	325	80	300	116.5	51.0	90.5	94.4	1240	S-4.8
A208/2.5 S	NGA20802D5HS0SA	8	2.5	125	60	240	133.5	36.5	63.0	66.6	780	S-4.8
A208/3.8 S	NGA20803D8HS0SA	8	3.8	190	60	240	85.9	51.8	95.0	98.9	1100	S-4.8
A212/2.5 S	NGA21202D5HS0SA	12	2.5	125	60	240	199.5	36.7	63.5	67.4	1200	S-4.8



Container, approval and terminal

Container: ABS

Approval: Underwriters Laboratories (UL), USA



Design life: 5 years; 400 cycles acc. to IEC 896-2

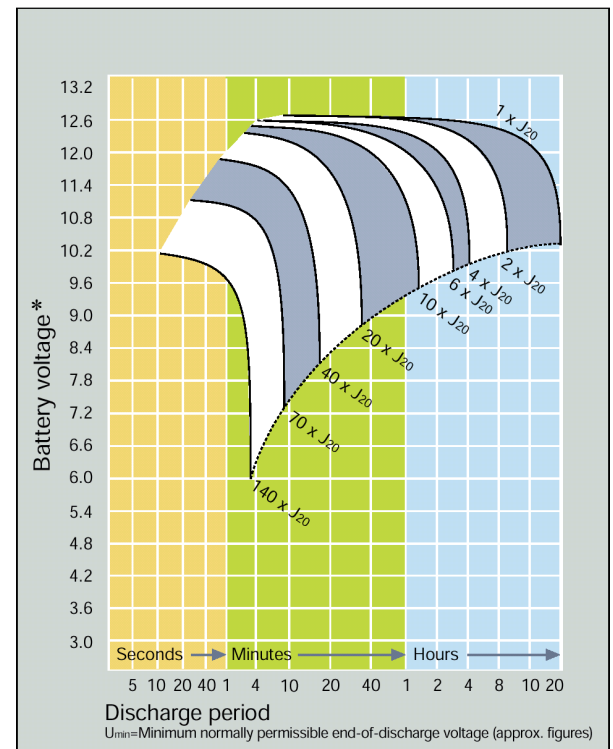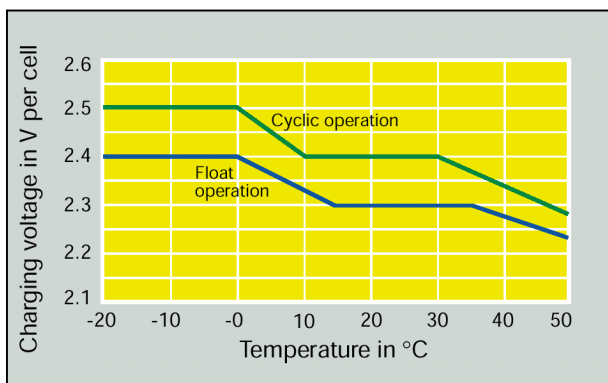

EXIDE Technologies
Network Power
Im Thiergarten
63654 Büdingen
Germany

Tel.: +49 (0) 60 42 / 81 70
Fax: +49 (0) 60 42 / 81 233

www.networkpower.exide.com

EXIDE Technologies
3950 Sussex Avenue
Aurora, IL, U.S.A.

Tel.: +1 630.862.2200
Fax: +1 630.862.2312